




Grand Master BTE 675 Information Sheet

	BTE 675	BTE 675
	SP	SP (Dir)
		
BTE Product Options		
Battery Size	675	675
Directional	✗	✓
Multi Program	✓	✓
Multi Function Digital VC	✓	✓
Telecoil	✓	✓


Fitting Range

Grand Master BTE 675 (SP)

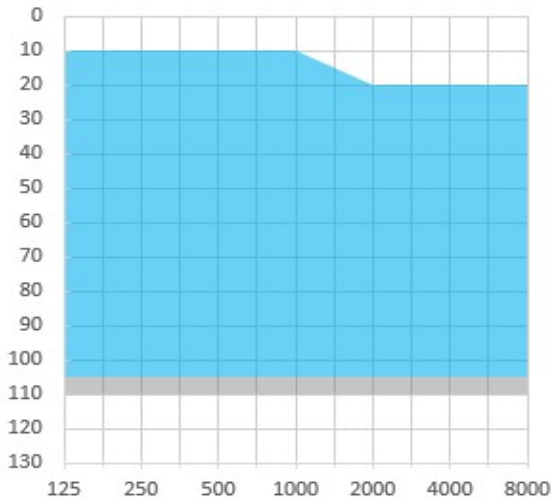


Technical Description


1. Ear Hook
2. Multi-Function Digital VC & Program Change
3. Battery Compartment
4. Mic(s)
5. Option door

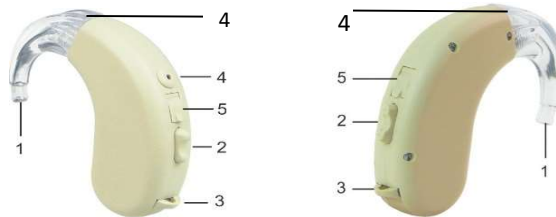

Programming via cable 4 pin



1. Open the option door for access to the programming socket.



2. Connect the programming plug into the socket.
Use the programming cable 4 Pin only.
3. Please ensure that the hearing instrument is on during programming.